

FEATURES

- HIGH RELIABILITY FOR LOW COST

PETERMANN

TECHNIK

Time & Frequency Components


XT SERIES OF CERAMIC TRAP FOR TV/VCR

3.58 ~ 6.5 MHz


PART NUMBER	CENTER FREQUENCY (fn1) (MHz)	ATTENUATION (at fn1) (dB) min.	30 dB ATTENUATION BW (fn1) (kHz) min.
XT3.58MB	3.580	25	40 (25dB att:BW)
XT4.43MB	4.430	30	40
XT4.5MB	4.500	35	50
XT5.5MB	5.500	35	70
XT5.74MB	5.742	35	70
XT6.0MB	6.000	35	70
XT6.5MB	6.500	35	70

THE LEVEL AT 1 MHz SHALL BE MADE FOR A REFERENCE (0dB)

CHARACTERISTICS

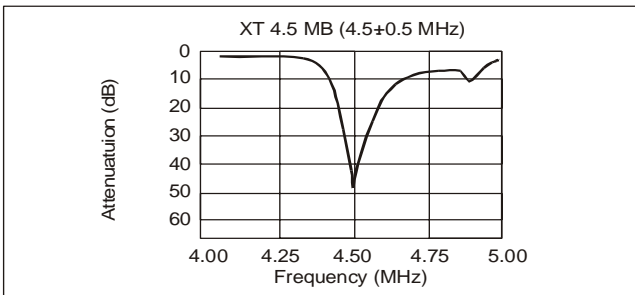

TEST CIRCUIT

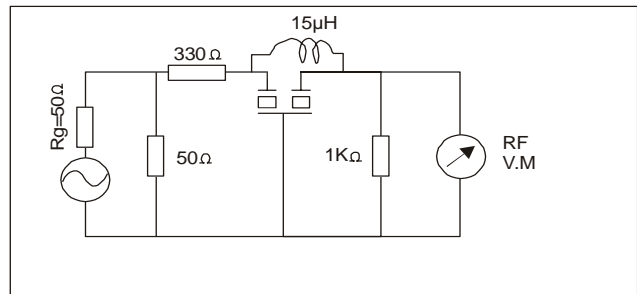

XT SERIES OF DOUBLE TRAP FOR TV/VCR

4.5 ~ 6.5 MHz

PART NUMBER	CENTER FREQUENCY (fn1) (MHz)	CENTER FREQUENCY (fn2) (MHz)	ATTENUATION (at fn1) (dB) min.	ATTENUATION (at fn2) (dB) min.	30 dB ATT. BW(fn1) (kHz) min.
XT4.47MW	4.500	4.724	30	30	50
XT4.60MW	4.500	6.000	30	30	50
XT5.57MW	5.500	5.742	30	30	50
XT5.60MW	5.500	6.000	30	30	50
XT5.65MW	5.500	6.500	30	30	50
XT6.65MW	6.000	6.500	30	30	70

THE LEVEL AT 1 MHz SHALL BE MADE FOR A REFERENCE (0dB)

PACKAGE DIMENSION FOR XT + XT DOUBLE CERAMIC TRAP

