

# SMD WATCH CRYSTAL 32.768 kHz

SERIES M1610 STANDARD (2 pad housing 1.6x1.0mm)

## FEATURES

- + Smallest available low cost watch crystal
- + Ultra low profile
- + Extended operating temperature range of up to -40/+125°C
- + Excellent clock generator for CPU's, Wireless, Mobile Comm., etc.




## GENERAL DATA

PB FREE / ROHS-2 2011/65/EU COMPLIANT


PARAMETERS	PRODUCT FEATURES AND CONDITIONS
SMD-CRYSTAL SERIES	M1610
NUMBER OF SOLDER PADS	2
FREQUENCY RANGE	32.768 kHz
FREQUENCY TOLERANCES AT 25°C	±20 ppm (standard) / ±10 ppm ~ ±100 ppm (option)
LOAD CAPACITANCE (C <sub>L</sub> )	12.5 pF (standard) 4, 6,7 and 9pF available on request
WORKING TEMPERATURE RANGE	-40/+85°C or -40/+105° or -40/+125°
RESONANCE RESISTANCE	70 kΩ typ. /90 kΩ max.
SHUNT CAPACITANCE (C <sub>s</sub> )	1.4 pF typ.
TURNOVER TEMPERATURE	+25°C ±5°C
PARABOLIC COEFFICIENT	-0.04 ppm/°C <sup>2</sup>
DRIVE LEVEL	0.2 μW typical (0.5 μW max.)
AGING	±3 ppm max. per year
INSULATION RESISTANCE	>500 MΩ DC/100V ±10%
STORAGE TEMPERATURE	-55°/+125°C
DELIVERY FORM	Tape and Reel (1.000 ~ 3.000 pcs per reel)

[OTHER PARAMETERS ARE AVAILABLE ON REQUEST / CREATE HERE YOUR SPECIFICATION](#)

## DIMENSIONS

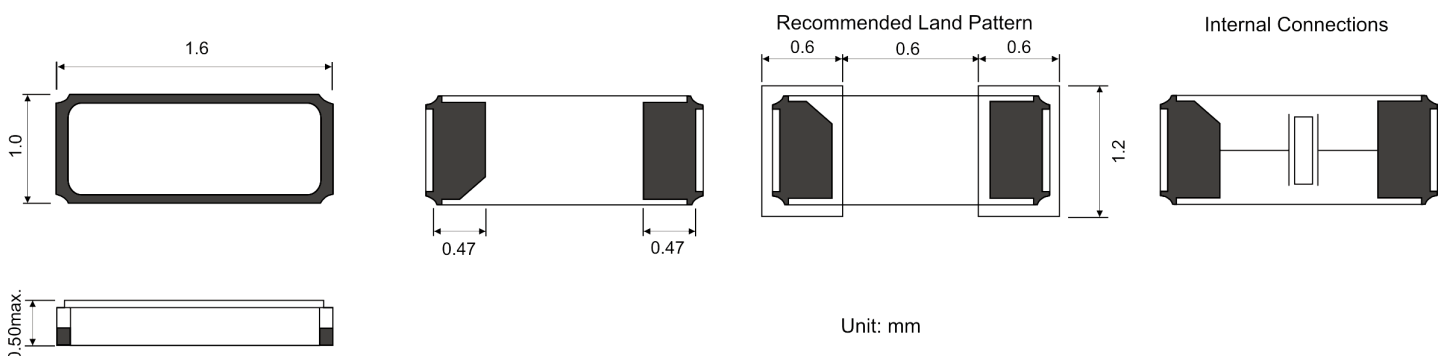

## REFLOW SOLDER PROFILE

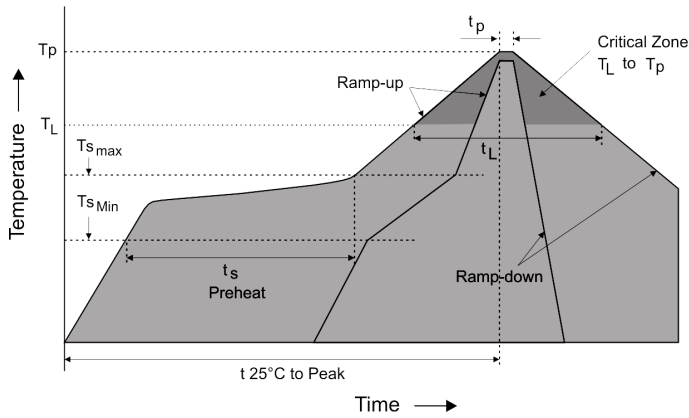

Profile Feature	Pb-Free Assembly
Average ramp-up rate (TL to TP)	3°C/second max.
Preheat:	
Temperature Min (T <sub>smin</sub> )	150°C
Temperature Max (T <sub>smax</sub> )	200°C
Time (min to max) (t <sub>s</sub> )	60-180 seconds
Time maintained above:	
Temperature (T <sub>L</sub> )	217°C
Time (t <sub>L</sub> )	60-150 seconds
Peak/Classification Temperature (T <sub>p</sub> )	260°C
Time within 5°C of actual Peak Temperature (t <sub>p</sub> )	20-40 seconds
Ramp-down Rate	6°C/second max.
Time 25°C to Peak Temperature	8 minutes max.

## ORDERING INFORMATION

SERIES

FREQUENCY STABILITY AT 25°C

M1610-32.768kHz-±20ppm-12.5pF (-40/+85°C)

FREQUENCY

LOAD CAPACITANCE

TEMPERATURE RANGES:  
(-40/+85°C) - STANDARD  
(-40/+105°C) - OPTIONAL  
(-40/+125°C) - OPTIONAL

EXAMPLE: M1610-32.768kHz-±20ppm-12.5pF (-40/+85°C)  
PLEASE INDICATE YOUR REQUIRED PARAMETERS



## REVISION HISTORY<sup>[1]</sup>

REVISION	RELEASE DATE	AMENDMENTS SUMMARY
01	February 2018	+ Added two temperature ranges: 40/+105°C and -40/+125°C + Revised load capacitance + Revised shunt capacitance

Note:

1. Based on Datasheet version from May 2015/SPEC 01/REV.00



## PREMIUM QUALITY BY PETERMANN-TECHNIK



OUR COMPANY IS CERTIFIED ACCORDING TO ISO 9001:2015 IN OCTOBER 2016 BY THE DMSZ CERTIFIKATION GMBH.

THIS IS FOR YOU TO ENSURE THAT THE PRINCIPLES OF QUALITY MANAGEMENT ARE FULLY IMPLEMENTED IN OUR QUALITY MANAGEMENT SYSTEM AND QUALITY CONTROL METHODS ALSO DOMINATE OUR QUALITY STANDARDS.