

SMD WATCH CRYSTAL 32.768 kHz

SERIES M8208 (4 PAD HOUSING 8.7x3.7MM)

FEATURES

- + Cheapest available SMD-Watch-Crystal
- + High performance for low cost
- + ± 10 ppm frequency tolerance at 25°C deliverable on request
- + Standard operating temperature range of -40/+85°C
- + Excellent clock generator for CPU's, Wireless, Mobile Comm., etc.




GENERAL DATA

ROHS-2 COMPLIANT


PARAMETERS	PRODUCT FEATURES AND CONDITIONS
SMD-CRYSTAL SERIES	M8208
NUMBER OF SOLDER PADS	4
PAD CONNECTION	Pad # 1 + 4 = XTAL Pad # 2 + 3 = do not connected / not connect to ground
FREQUENCY RANGE	32.768 kHz
FREQUENCY TOLERANCES AT 25°C	± 20 ppm (standard) / ± 10 ppm ~ ± 100 ppm (option)
LOAD CAPACITANCE (C _L)	12.5 pF (standard) 6,7,8 and 9pF available on request
WORKING TEMPERATURE RANGE	-40/+85°C
RESONANCE RESISTANCE	50 kΩ max.
SHUNT CAPACITANCE (C ₀)	1.5 pF typ.
PARABOLIC COEFFICIENT	-0.035 ± 0.008 ppm/ Δ °C ²
DRIVE LEVEL	1.0 μ W max. (other parameters deliverable on request)
AGING	± 5 ppm max. per year
INSULATION RESISTANCE	>500 MΩ DC/100V $\pm 10\%$
STORAGE TEMPERATURE	-55°/+125°C
DELIVERY FORM	Tape and Reel (1.000 ~ 3.000 pcs per reel)

[OTHER PARAMETERS ARE AVAILABLE ON REQUEST / CREATE HERE YOUR SPECIFICATION](#)

DIMENSIONS

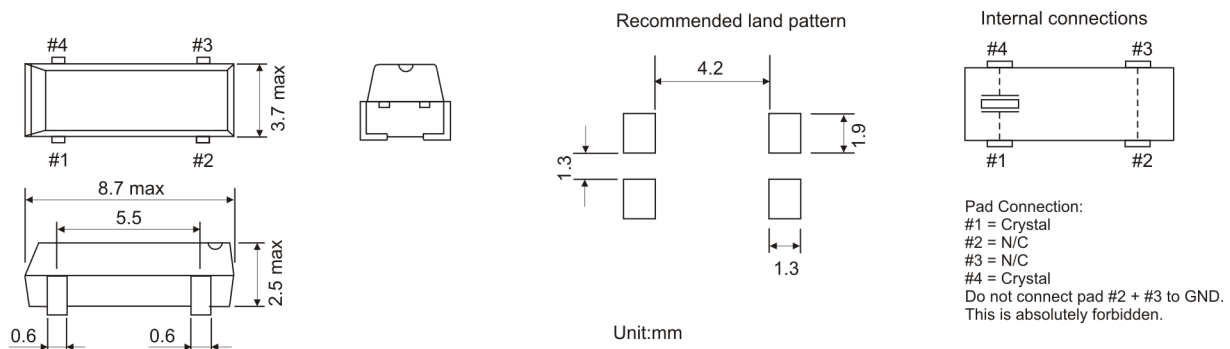


REFLOW SOLDER PROFILE

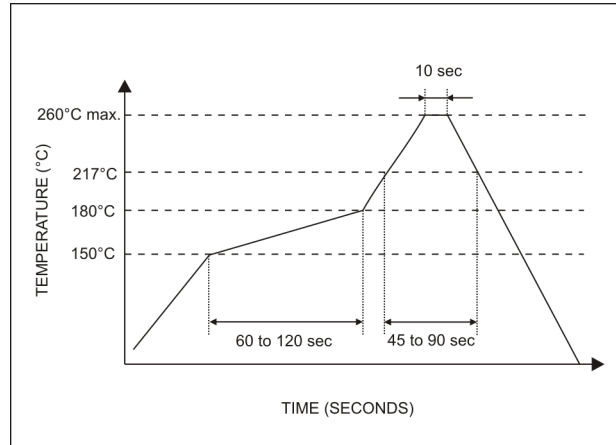

Soldering instruction:

The M8208 is suitable for 1 reflow solder process. The max. temperature directly at the component may not exceed the temperature of 260°C for 10 sec. max. Do not solder the M8208 twice nor submit it to another additional thermal stress.

ORDERING INFORMATION

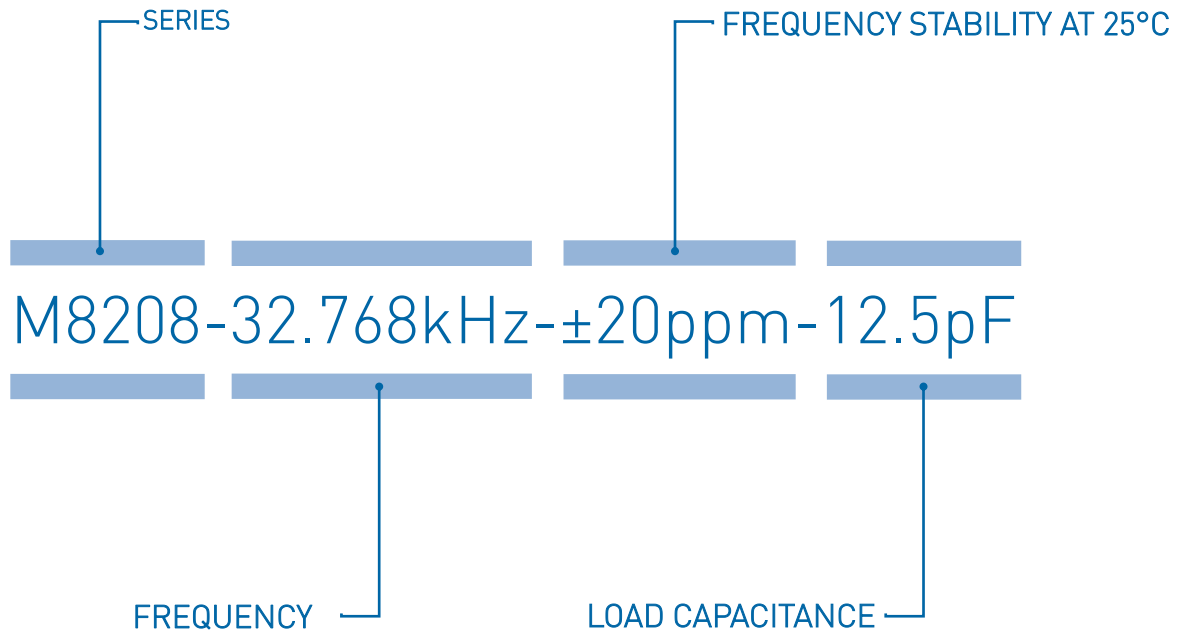

EXAMPLE: M8208-32.768kHz-±20ppm-12.5pF
 PLEASE INDICATE YOUR REQUIRED PARAMETERS



REVISION HISTORY^[1]

VERSION	RELEASE DATE	AMENDMENTS SUMMARY
01	12/12/16	+ Updated Reflow Solder information

Note:

1. Based on Datasheet version from May 2015/SPEC 01/REV.00



PREMIUM QUALITY BY PETERMANN-TECHNIK



OUR COMPANY IS CERTIFIED ACCORDING TO ISO 9001:2015 IN OCTOBER 2016 BY THE DMSZ CERTIFIKATION GMBH.

THIS IS FOR YOU TO ENSURE THAT THE PRINCIPLES OF QUALITY MANAGEMENT ARE FULLY IMPLEMENTED IN OUR QUALITY MANAGEMENT SYSTEM AND QUALITY CONTROL METHODS ALSO DOMINATE OUR QUALITY STANDARDS.

© PETERMANN-TECHNIK GmbH 2016. The information contained herein is subject to change at any time without notice. PETERMANN-TECHNIK owns all rights, title and interest to the intellectual property related to PETERMANN-TECHNIK's products, including any software, firmware, copyright, patent, or trademark. The sale of PETERMANN-TECHNIK products does not convey or imply any license under patent or other rights. PETERMANN-TECHNIK retains the copyright and trademark rights in all documents, catalogs and plans supplied pursuant to or ancillary to the sale of products or services by PETERMANN-TECHNIK. Unless otherwise agreed to in writing by PETERMANN-TECHNIK, any reproduction, modification, translation, compilation, or representation of this material shall be strictly prohibited.